



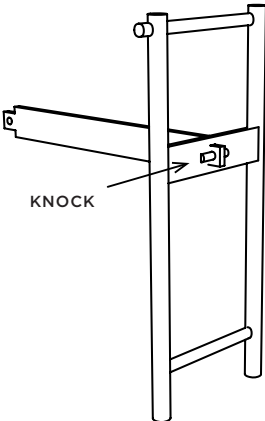



1

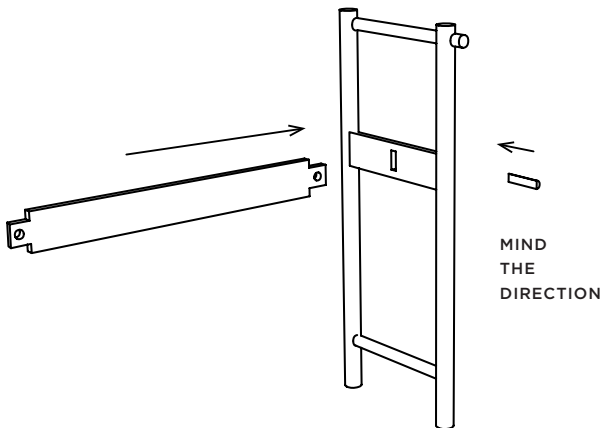



For a stable asseby, please ensure that the wedge is installed firmly from the intended direction. You have placed the wedge from the wrong direction If there appears a gap on either side between the wedge and the crossmember, causing instability. Use a light hammer to knock the wedge firmly in place.

2


Workdesk

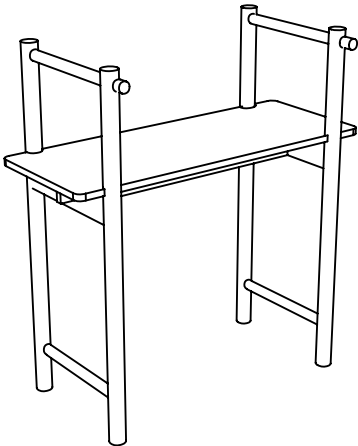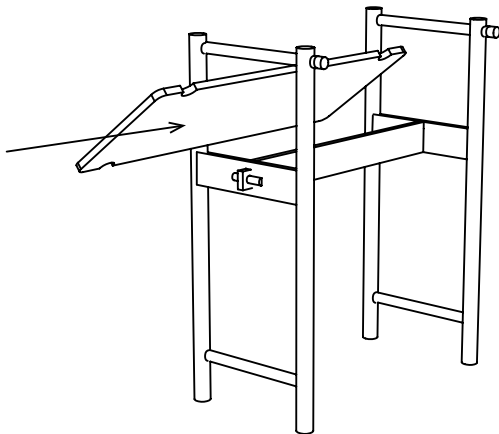


Side board, Shelf

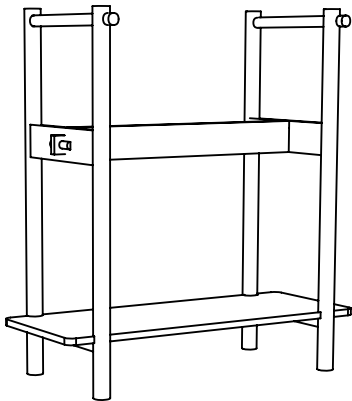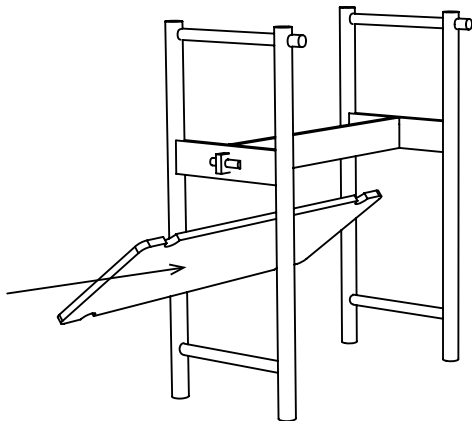


3 Standing position

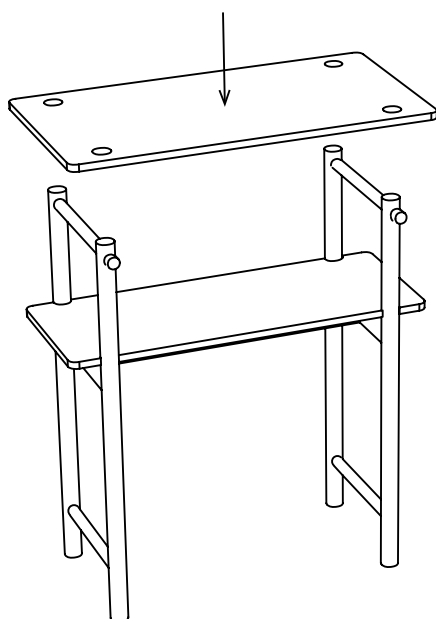


In case the legs have altered position and don't fit perfectly the table top, turn the table towards the floor and knock the back legs with a light hammer and isolating block until the legs fit the table top.

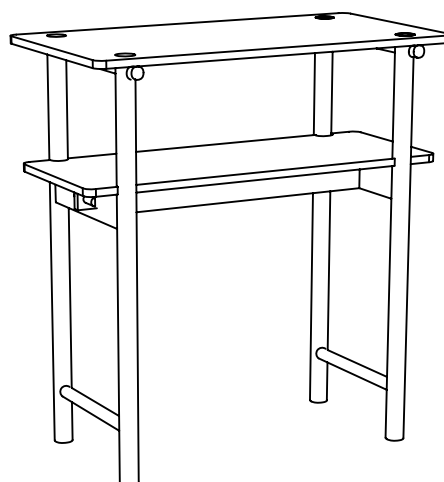


Sitting position

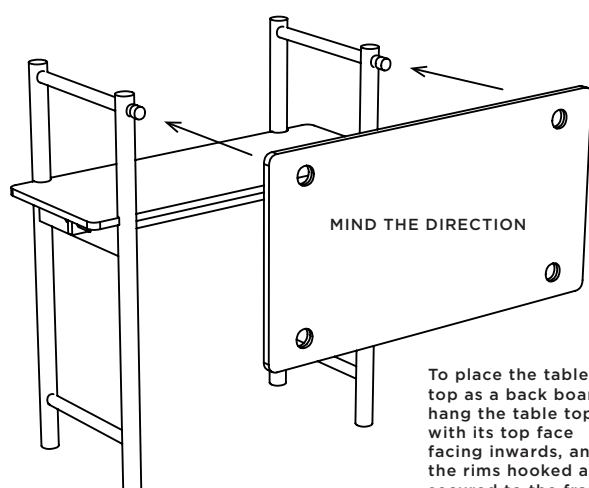

To place the table top as a back board, hang the table top with its top face facing inwards, and the rims hooked and secured to the frame.

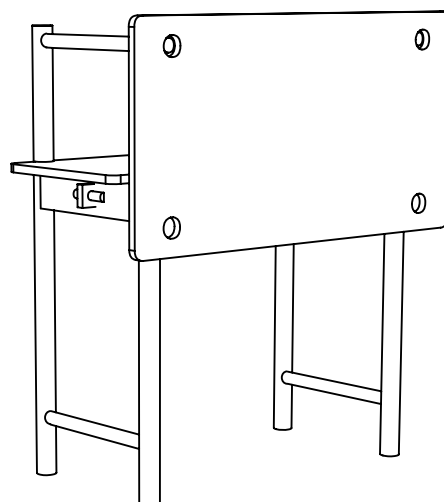

4 Cross support (optional)

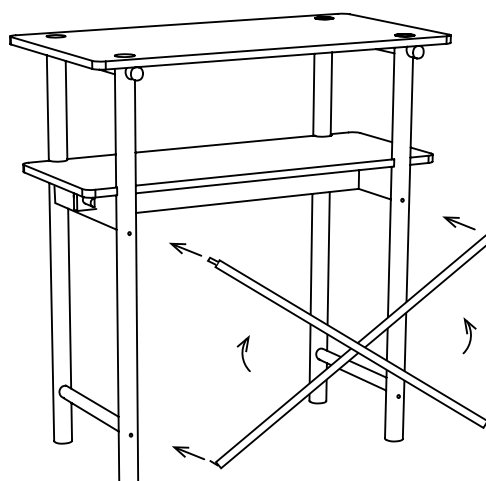

Optional: for increased stability, attach the steel support to the designated holes.